


TEL 585-469-6371 FAX 315-483-4388

www.AirtightServicesInc.com

Goal: To achieve a high continuous R-value that will withstand water as well as rodent infestation. The best product to use is rigid foamboard (either foil faced or pink and blue).

R-Value per inch: Foil Faced = 6.5 Pink or Blue = 5.0

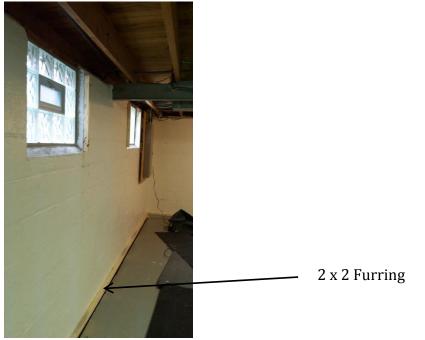

Basement Wall before insulation.



Basement wall with foil faced foamboard. All seams and fasteners are taped with foil tape.



TEL 585-469-6371 FAX 315-483-4388

www.AirtightServicesInc.com



Foamboard attached to 2 x 2 Furring Strip

Basement walls with Thermax® fire rated foamboard installed

